

123-130-3311-Asnawi-Sep-2022- 97

by 123-130-3311-asnawi-sep-2022-97 123-130-3311-asnawi-sep-2022-97

Submission date: 01-Apr-2023 11:58AM (UTC+0700)

Submission ID: 2052709753

File name: 123-130-3311-Asnawi-Sep-2022-97.pdf (1.21M)

Word count: 4442

Character count: 24528

1 ANALYSIS OF MICROTREMOR H/V SPECTRAL RATIO AND PUBLIC PERCEPTION FOR DISASTER MITIGATION

Yusran Asnawi^{1,2}, Andrian Simanjuntak^{1,3,5}, *Umar Muksin^{4,5}, Syamsul Rizal¹, Muhammad Syukri⁴, Mira Maisura², R. Rahmati⁶

¹Graduate School of Mathematics and Applied Sciences, Universitas Syiah Kuala, Indonesia

²Department of Information and Technology Education, Universitas Islam Negeri Ar-Raniry, Indonesia

³Badan Meteorologi Klimatologi dan Geofisika, Aceh Besar, Aceh, Indonesia

⁴Department of Physics, Faculty of Mathematics and Natural Sciences, Universitas Syiah Kuala, Indonesia

⁵Tsunami Disaster and Mitigation Research Center, Universitas Syiah Kuala, Indonesia

⁶Department of Physics Education, Universitas Islam Negeri Ar-Raniry, Banda Aceh, Indonesia

*Corresponding Author, Received: 19 Feb. 2022, Revised: 05 June 2022, Accepted: 02 Aug. 2022

ABSTRACT: The NW–SE-striking Seulimeum fault in northernmost Sumatra has triggered several major earthquakes in the last decades and can thus harm the surrounding community. The microtremor HVSR method was implemented in the Lamteuba area, which is proximate to the Seulimeum fault, to analyze the possible seismic impact of numerous shallow-depth earthquakes. HVSR values were calculated for 21 sampling points. Results show that the dominant frequency is between 1 and 4 Hz, and the dominant period is 0–0.13; these are associated with young volcanic sediment. The areas with the highest amplification are located in the central and southern parts of the study area, with a vulnerability value (K_g) greater than 1. The K_g value of the northern part is under 1 because of its proximity to a Tertiary volcanic rock formation. About 40% of the study area is vulnerable to earthquakes, as suggested by the high susceptibility index, which is associated with soft sediment. These results are supported by the perception of the local community, which serves as a framework for acculturating the mitigation. The public perception responses show a lack of the knowledge and infrastructure needed to mitigate disasters in the area. This study also reveals a lack of actions to be taken before, during, and after a disaster. This work successfully combines seismic analysis with public perception to determine the earthquake risk level and develop a mitigation plan for the study area.

Keywords: Microtremor, Amplification, Earthquake, Public perception, Mitigation, Seismic, Disaster

1. INTRODUCTION


In June and November 2020, two M 5.0 earthquakes occurred in the northern part of the Seulimeum fault (Fig. 1). Both earthquakes, with an intensity of MMI II–IV, were generated by dextral mechanisms at shallow depths [1]. Other devastating earthquakes at fault include an M 6.5 earthquake that struck the northern part in 1960 [2,3], an M 6.0 earthquake that struck the central part in 1960 [4] and an M 6.0 earthquake that struck the southern part in 1980 [5]. People have reported severe damage and loss from past earthquakes, and Lamteuba is the most-affected area [6].

Lamteuba is a densely populated area on the Seulimeum fault and needs to be studied for disaster mitigation shortly. Tectonically, Lamteuba is proximate to the Seulimeum fault, which has been the northernmost segmentation of the Sumatra fault system since the Cenozoic [7,8]. With a length of ~100 km and a slip rate of ± 2.5 cm/year, the Seulimeum fault can generate an earthquake with a magnitude above 6.0 [9].

The districts along the Seulimeum fault can be categorized as a seismic-prone zone, especially Lamteuba, which has experienced massive devastation from past earthquakes [4,10]. Therefore, a comprehensive study on the seismic microzonation of Lamteuba is urgently needed to support a disaster management program for the site [3,4,5]. In this research, we study the microtremor HVSR in Lamteuba and conduct a survey on public perception of earthquake disasters in the area. Findings show that seismic microzonation is needed to develop a disaster mitigation program for the area.

Seismic microzonation is globally used for several purposes, such as for understanding the site effect [10], subsurface properties [10,11], disaster management [13,14], and seismic hazard and geotechnical studies [14,15]. In addition, public perception of earthquakes is required as a framework for acculturating disaster mitigation [16,17]. For this study, a survey is needed because there is insufficient information about earthquake mitigation programs in Lamteuba. Furthermore, we determine the level of earthquake vulnerability in the Lamteuba area and assess the readiness of

the community, especially education stakeholders, using the public perception of earthquake disasters.

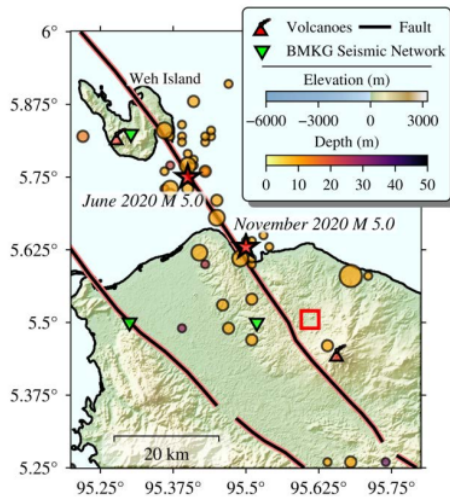

4
Fig. 1 Historical earthquakes near the study area that have been felt by the local people in the last decade. The red square is the study area.

2. RESEARCH SIGNIFICANCE

The initial survey yielded three main types of data: public knowledge of earthquakes, disaster vulnerability, and the need for facilities that support the disaster mitigation process in the region. According to these initial findings, micro zonation studies are needed to strengthen the seismic knowledge of various circles of society, which in turn can reduce the effects of future damage [14,23]. In addition, future collaborative research based on multidisciplinary studies is required to support a disaster mitigation program. Nevertheless, the microtremor HVSR and public perception of earthquake disasters are prerequisites for initiating and advancing mitigation studies in Lamteuba.

3. MATERIAL AND METHODS

3.1 Data Observation and Location

Twenty-one locations in the Lamteuba subdistrict were measured. The sites cover important public infrastructures, such as the district community, the district office, and schools. The study area is at the eastern part of the Seulimeum fault and lies at a distance of 5–10 km from Seulawah Agam.

The grid of the observation points was set to 200–500 m to cover the area spatially. The instrument used was a broadband seismometer recorded at a sampling rate of 100 samples per second in 30–45 min with a constant transduction factor of 800 V/m/s. The point locations were carefully selected to prevent the recording from being affected by noise from trees, sources of uniform noise (such as machine activity), and strong topographic features. The noise was classified as a transient signal that could be reduced.

Furthermore, the observation points were near public infrastructures, such as the district office and five state schools (primary schools such as SDN 1 Lamteuba, SDN 2 Lamteuba, and MIN Lamteuba, junior high and senior high schools such as SMPN 2 Seulimeum and SMAN 2 Seulimeum). We also surveyed to highlight the preparedness and knowledge of the public about earthquakes.

12 3.2 HVSR Method

In the horizontal/vertical spectral ratio (HVSR) method, the horizontal and vertical components of a seismic waveform are compared to determine a dominant parameter [16]. The HVSR method was developed by Nakamura [21,22] as a convenient tool for estimating natural frequencies by calculating the ratio spectrum of a recorded microtremor signal as follows:

$$\frac{H}{V} = \frac{H_{(w)}}{V_{(w)}} = \frac{\sqrt{S^2(w)_{NS} + S^2(w)_{EW}}}{S^2(w)_Z} \quad (1)$$

In the above equation, the horizontal power spectrum is divided into north-south (NS) and east-west (EW) components, and Z is the vertical component of the waveform. The spectral ratio generally shows various peaks, which are caused by multiple reflections and refractions of incident waves [17]. H/V peaks are empirically an estimation of Rayleigh waves, which dominantly occur at higher frequencies.

Each site has an individual, isolated frequency, which is influenced by subsurface conditions, such as soil thickness, density, and compactness. Through the ratio, a dominant parameter can describe the vulnerability (K_g) in an area. The vulnerability (K_g) from Nakamura [21,22] can be calculated as follows:

$$K_g = \frac{A^2}{F} \quad (2)$$

K_g is useful for identifying areas with weak and poor soil resistance, seismic vulnerability levels, and the possibility of damage that may be heightened by the macroseismic intensity and ground shaking [19].

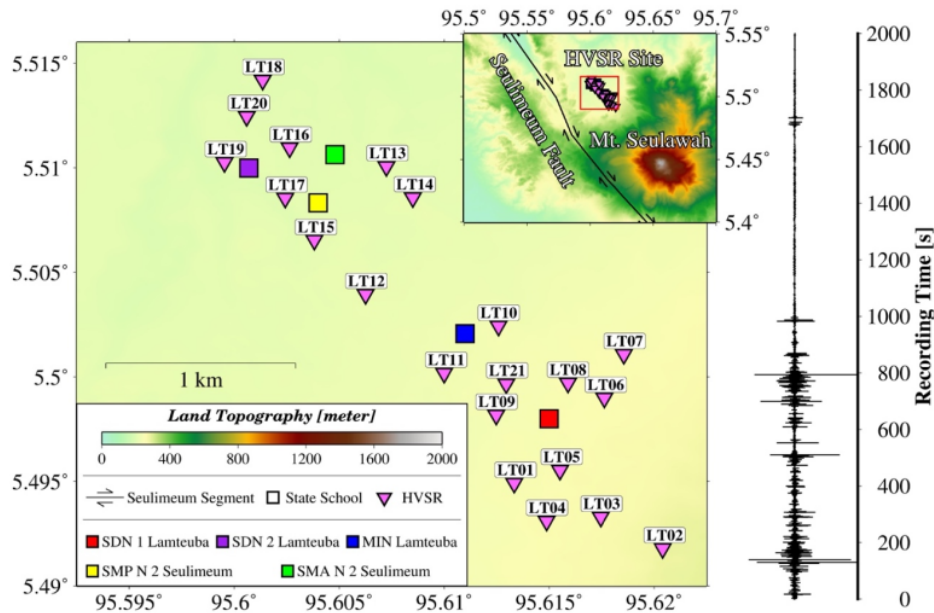


Fig. 2 Survey location in the Lamteuba subdistrict, 21 sampling points, and a sample seismic recording of the vertical component of site LT12 in the 2000s.

3.3 Geologic and Tectonic Settings

The geological setting of the study area, as shown in Fig. 2, is dominantly influenced by local tectonic activity with major fault movement in the right lateral direction [6].

Geomorphologically, the study area is in high-topography regions that are characterized by mountains and steep hills [8]. Lithologically, the study area has been composed of volcano-sedimentary rocks (Lamteuba Volcanic Group) since pre-Tertiary [4,5,8]. It consists of volcanic products from the eruption of Seulawah Agam, such as tuff, breccia, and ash-flow comprising tuffaceous sandstones, conglomerates, and mudstones [20]. These products are considered rock materials based on the classification of the Indonesian National Standard [21].

Young alluvial and volcanic structures, including flat-topped hills, lie along the entire western edge. A flat-topped hill follows closely to the Seulawah Agam, figuring a fault surface structure, namely, the Seulimeum fault. The branch faults control the area in the NW-SE direction. The morphology in the study area is subdued because the rock structure is strongly fractured [20].

The study area is cut by an active fault in the NW-SE direction parallel to the Aceh fault. The rock is compact, but some areas with claystone are highly fractured. The fracture can locally generate impedance contrast between the dense rock and young sediment. Some rocks are influenced by quaternary alluvial sediment that can generally be classified as prone soil.

3.4 Respondents' Data

Data were collected using a public survey. The respondents were divided into three groups based on their background: students from elementary to high school, teachers and headmasters, and community leaders. This study involves 85 students accompanied by 20 teachers from five schools. Among school officials, headmasters and teachers are important, given that schools have removed lessons related to disaster mitigation [22].

Risk education is a long process that transcends the knowledge-sharing stage; it is accompanied by an understanding of choices and preparedness actions to be implemented to recover during disasters [23]. The last group was from the community and involved several civil servants and farmers. Community leaders are vital because they play a crucial role, such as by giving suggestions and recommendations to the local people.

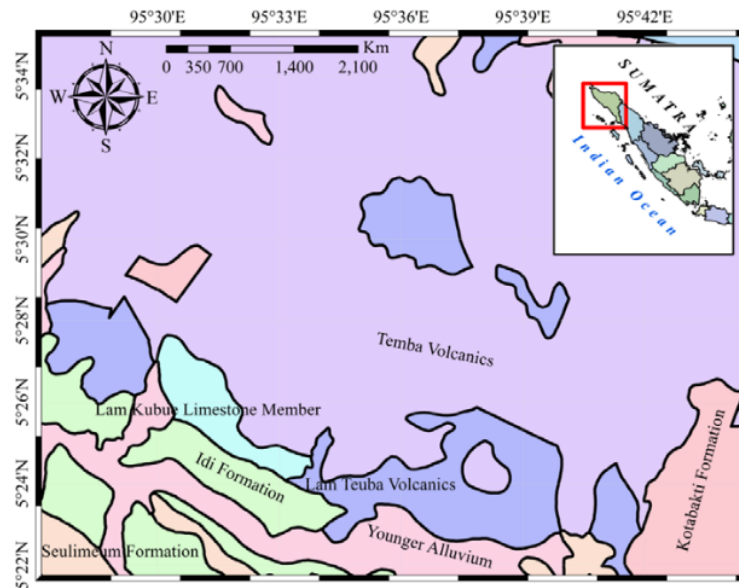


Fig. 3 Geological map of the study area, which mostly consists of volcanic rock and sediment.

4. RESULTS AND DISCUSSION

We started our analysis by examining the wave quality and removing transient effects with anti-triggering by comparing the short-term average (STA) and long-term average (LTA) between 0 and 30 s. Then, the data were filtered between 0.5 and 15 Hz. Each component was windowed in 20 s steps with a 5% cosine taper. Smoothing was performed to refine the pattern by using the Konno–Ohmachi method [24,25] and obtaining the HVSR with the logarithmic window function. The parameter results were relatively uniform at all sites: frequency of 1–5.5 Hz, period of 0–1 s, amplification of 0–1.8, and vulnerability of 0–2.4.

The soil classification and type were determined based on Kanai and Tanaka's model [26]. Such classification is important for highlighting the geological properties of Lamteuba. The classification was based on the microtremor parameters of each measurement point, such as the dominant frequency, dominant period, amplification, and vulnerability index. The dominant frequency generally illustrates the condition of the soil, which is quite soft and has alluvium and mud in the study area. Then, the interpolation results of the microtremor parameters at all sites were mapped to elucidate the spatial conditions in the study area (Fig. 4).

a. Spatial Analysis of HVSR Parameter

We used interpolation to identify spatial differences and obtain a clear area that has a dominant parameter. The interpolation results are frequency map, period map, amplification map, and seismic vulnerability. The information from the maps corresponds to three different recordings (from northern, southern, and central parts).

At site LT16 (northern part), the soil is compact, with a 4.885 Hz frequency and a low amplification of 0.5. As for the southern part, the parameter values at LT05 are almost the same as those at LT06, thus indicating a similarity in rock properties. In the central part, LT11 has low parameter values due to the presence of sedimentary rock, which is less compact than the rocks at LT16 and LT05.

The dominant frequency is relatively uniform, ranging from 1 to 6 Hz. Frequency maps may be associated with topography, geological conditions, and bedrock depth. A smaller frequency indicates a greater bedrock depth. In the study area, the central part may have a deeper bedrock compared with the northern and southern parts. The amplification factor, as the peak HVSR, ranges from 0.3 to 1.5, as shown in Fig. 4.

The dominant factor in amplifying the seismic waveform on the ground surface is the amplification factor. The highest amplification can be found in the northern and southern parts, which have higher topographies. The distribution of high amplification in the study area may be associated with low topographies, but it is not influenced by the dominant frequency, and no empirical correlation is established for both parameters.

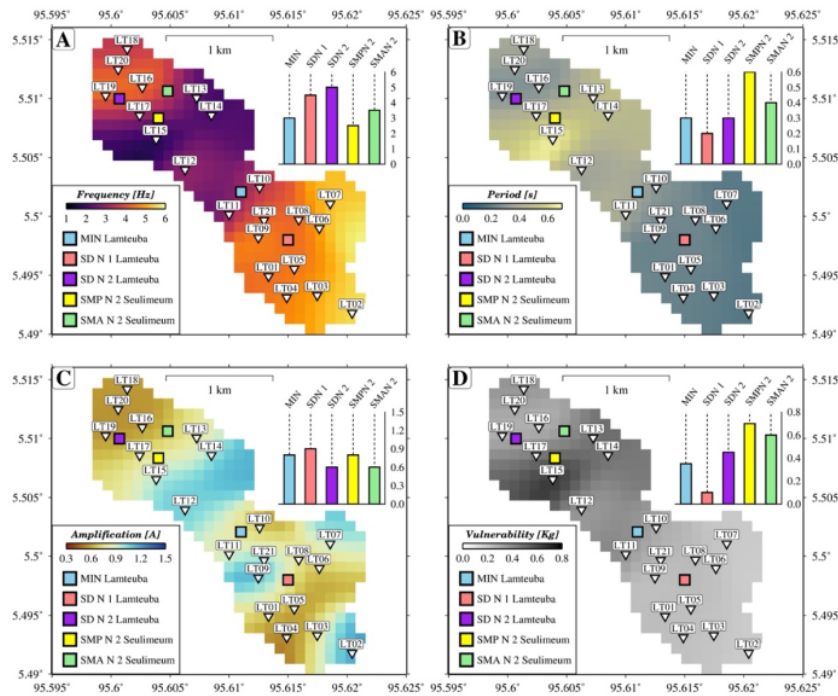


Fig. 4 Spatial interpolation of (A) dominant frequency, (B) dominant period, (C) amplification, and (D) vulnerability for all sampling points.

Variations in the physical properties of rocks, such as shear modulus, damping ratio, and density, also influence the amplification factor. By contrast, the density and saturation state of the bedrock are insignificant. The saturation of the soil layer may affect the amplification factor. Thus, the geological condition has a dominant influence on the amplification variation. Low density and saturation can amplify a surface wave and generate a massive shake when traveling through a poor structure.

Amplification, determined from the HVSR (Fig. 4), is debatable because there is no specific correlation between the ratio and the spectral amplification from strong-motion sensors. Moreover, the northern part, which has a low amplification value, may be recommended as a location for strong-motion sensors. The vulnerability (K_g) from the HVSR is important for identifying areas of potential damage.

Knowledge about potential damage is important to support disaster risk reduction shortly. Many earthquakes cause massive damage because the building is poor and not connected to the site response and properties. As stated in previous studies [13,15,20,22], the distribution value of K_g corresponds to potential damage. The K_g parameter also reflects local side effects and can be used as an

indicator in selecting earthquake-prone areas [28]. The K_g values in the northern area are higher than those in the southern area. In particular, the northern sites are weak zones that may fail during an earthquake. The awareness of people in such a high-vulnerability area, where many buildings are located, should thus be enhanced.

b. Survey Results

Most of the infrastructure in the study area is in a region with high vulnerability. We conducted a scenario-based survey to gain insights into the local community's knowledge of disasters. The survey generated various answers regarding the respondents' levels of knowledge of earthquakes.

c. Teachers

The educators consisted of teachers from elementary school (SD), madrasah ibtidaiyah (MI), junior high school (SMP), madrasah tsanawiyah (MTs), and senior high school (SMA). Eighty percent of the respondents do not have any information about past earthquakes, as shown in Fig. 5. Information access is poor due to the inferior network connection in the study area. This finding

conflicts with their responses about their knowledge. Specifically, 90% of the respondents reported knowing the definition of a disaster, and 60% stated having adequate knowledge in this regard. Thus, the teachers need to be further educated through several workshops that will provide added information about earthquake disasters.

d. Students

The students gave significantly varied responses between one and other related questions. All of them had never heard of natural disasters that occurred in 1964. Nonetheless, they have a sufficient understanding of the types of disasters and adequately understand the steps to be taken before, during, and after a disaster. Half of the students were able to answer questions on disaster mitigation.

e. Disaster Mitigation Management

In the survey, we asked the respondents about having a disaster mitigation management system (Fig. 6). This system includes the provision of evacuation signs. It also has an early warning system, which is supposed to alert people if conditions show a potential disaster, the availability of medication, and health personnel, including the Red Cross Teen (PMR). Ten percent of the respondents are aware of evacuation signs. However, 90% believe that there are no signs provided within the area.

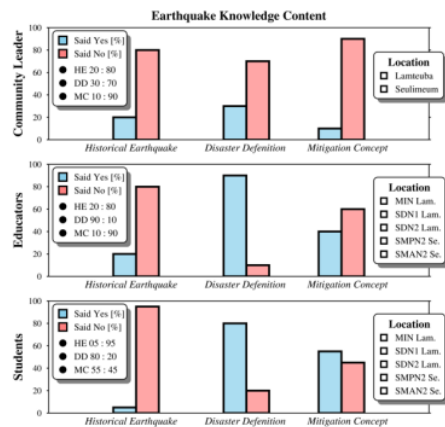


Fig. 5 Public perception survey results from community leaders, educators, and students about their knowledge of earthquakes, such as details on historical earthquakes, the definition of disasters, and the concept of mitigation.

This result differs from those of students and educators; an average of 48% of them believe that

signs are provided. Regarding medical facilities, 90% of the educators and community leaders believe that the area has better disaster information and availability of medication. Furthermore, 60% of the students know about such facilities.

The survey also inquired about disaster education, field simulation, early warning system, disaster act, and human response.

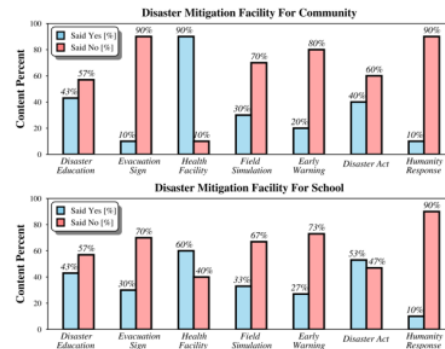


Fig. 6 Community leaders', educators', and students' knowledge of the concept of disaster mitigation and suitable facilities for the community and the schools.

On average, more than 60% assert that there is no alarm system in the area. Educational institutions should help reform school curricula to make them a good starting point in linking education and a disaster mitigation program that will be beneficial in the future [29].

Disaster signs and vulnerability maps are needed to direct the community to safe zones [30]. In addition to evacuation signs, an early warning system should be installed within the area as part of the disaster mitigation system. This will inform the community of potential earthquakes [31]. Furthermore, this research clearly shows a lack of information about disaster mitigation in the Lamteuba region.

The results of this study successfully provide disaster learning by combining microzonation and public perception. Our findings offer basic knowledge of earthquake disasters and what the public needs to support mitigation programs. A recommended direction of further research is the use of a seismic subsurface analysis method to determine the rock properties in the study area. A suitable evacuation program and practice based on vulnerability and subsurface conditions will reduce earthquake damage shortly.

5. CONCLUSIONS

Microtremor parameters showed that the central part of Lamteuba has weak soil and high seismic vulnerability. Low amplification can be found in the

northern part, which contains a rock formation. The public perception survey suggested that a mitigation program needs to be implemented before, during, and after a disaster. Earthquake parameters and probability should be disseminated quickly. The awareness of educators, students, and the local community has to be improved based on disaster and evacuation signs. Furthermore, the government should enhance the infrastructure in the area according to its geological conditions. An awareness attitude and an ideal mitigation concept will help save individuals.

6. ABBREVIATIONS

HVSR = Horizontal/Vertical spectral ratio

171 = Volcanic rock of Lamteuba

EW = East-west component

15 = North-south component

STA = Short-term average

LTA = Long-term average

7MR = Palang Merah Remaja (Red Cross Teen)

SMP = Sekolah menengah pertama (junior high school)

SD = Sekolah dasar (primary school)

MI = Madrasah ibtdaiyah (Islamic primary school)

MTs = Madrasah tsanawiyah (Islamic junior high school)

25 SMA = Sekolah menengah atas (high school)

7. REFERENCES

- [1] Pasari, S., Simanjuntak, A. V., Mehta, A. and Sharma Y., A synoptic view of the natural time distribution and contemporary earthquake hazards in Sumatra, Indonesia. *Natural Hazards*, vol. 108, Issue 1, 2021, pp. 309-321.
- [2] Hurukawa N., Wulandari B. R. and Kasahara M., Earthquake history of the Sumatran fault, Indonesia, since 1892, derived from the relocation of large earthquakes. *Bulletin of the Seismological Society of America*, Vol. 104, Issue 4, 2014, pp. 1750–1762.
- [3] Untung M., Buyung N., Kertapati E., Undang and Allen C.R., Rupture Along The Great Sumatran Fault, Indonesia, The Earthquakes of 1926 and 1943, *Bulletin of the Seismological Society of America*, Vol. 75, Issue 1, 1985, pp. 313–317.
- [4] Rusydy I., Idris Y., Muksin U., Cummins P., and Akram M. N., Shallow crustal earthquake models, damage, and loss predictions in Banda Aceh, Indonesia, *Geoenvironmental Disasters*, Vol. 7(8), 2020, pp. 1-16
- [5] Muksin U., Bauer K., Muzli M., Ryberg T., Irwandi N., Masturiyono M., and Weber M., AcehSeis project provides insights into the detailed seismicity distribution and relation to fault structures in Central Aceh, Northern Sumatra, *Journal of Asian Earth Sciences*, Vol. 171, Issue 9, 2019, pp. 20–27.
- [6] Sieh K. and Natawidjaja D., Neotectonics of the Sumatran fault, Indonesia, *Journal of Geophysical Research: Solid Earth*, Vol. 105, Issue 12, 2000, pp. 28295–28326.
- [7] Mccaffrey R., The Tectonic Framework of the Sumatran Subduction Zone, *Annual Review of Earth and Planetary Sciences*, Vol. 37, 2009, pp. 3.1-3.22.
- [8] Ito T., Gunawan E., Kimata F., Tabei T., Simons M., Meilano I., Agustan, Ohta Y., Irwandi N., and Sugiyanto D., Isolating along-strike variations in the depth extent of shallow creep and fault locking on the northern Great Sumatran Fault, *Journal of Geophysical Research*, Vol. 117, 2012, pp. 1–16.
- [9] Bradley K. E., Feng L., Hill E. M., Natawidjaja D. H., and Sieh K., Implications of the diffuse deformation of the Indian Ocean lithosphere for slip partitioning of oblique plate convergence in Sumatra, *Journal of Geophysical Research: Solid Earth*, Vol. 122, Issue 1, 2017, pp. 1-20.
- [10] Putra, R. R., Kiyono J., Yasuo Y., Ono Y., and Syahril S., Determined Soil Characteristic of Palu in Indonesia by Using Microtremor Observation, *International Journal of GEOMATE*, Vol. 10, Issue 2, 2016, pp. 1737-1742.
- [11] Asnawi, Y., Simanjuntak, A., Muksin, U., Okubo, M., Putri, S.I., Rizal, S. and Syukri, M., Soil classification in a seismically active environment based on shear wave velocity and HVSR data, *Global Journal Environmental Science and Management*, Vol. 8, Issue 3, 2022, pp. 297-314.
- [12] Noguchi T., Nishimura I., Ono Y., and Kohno M., Estimation of Subsurface Structure Based on Microtremor and Seismic Observations in Area Damaged by 2018 Hokkaido Eastern Iwuri Earthquake, *International Journal of GEOMATE*, Vol. 20, Issue 81, 2021, pp. 8–15.
- [13] Ren Y., Wen R., Yao X., and Ji K., Five parameters for the evaluation of the soil nonlinearity during the Ms 8.0 Wenchuan Earthquake using the HVSR method, *Earth, Planets, and Space*, Vol. 69, Issue 1, 2017, pp. 116.
- [14] Baytiyeh H. and Öcal A., High school students' perceptions of earthquake disaster: A comparative study of Lebanon and Turkey, *International Journal of Disaster Risk Reduction*, Vol. 18, 2016, pp. 56-63.
- [15] Mccaughy J. W., Daly P., Mundir I., Mahdi S., and Patt A., Socio-economic consequences of post-disaster reconstruction in hazard-

- exposed areas, *Nature Sustainability*, Vol. 1, Issue 1, 2018, pp. 38-43.
- [16] Cipta, A., Cummins, P., Dettmer, J., Saygin, E., Irsyam, M., Rudyanto, A. and Murjaya, J. Seismic velocity structure of the Jakarta Basin, Indonesia, using trans-dimensional Bayesian inversion of horizontal-to-vertical spectral ratios. *Geophysical Journal International*, Vol. 215, Issue 1, 2018, 431-449.
- [17] Nakamura Y., Clear Identification of Fundamental Idea of Nakamura' S, *Spectrum 2000, World Conferences on Earthquakes Engineering (12WCEE)*. Auck- land, Vol. 30, Issue 1, 2000, p. 25-33.
- [18] Nakamura Y., Real-Time Information Systems for Hazards Mitigation, *Railway Technical Research Institute/Tetsudo Gijutsu Kenkyujo*, Vol. 37, Issue 3, 1996, pp. 112-127.
- [19] Gosar A., Study on the applicability of the microtremor HVSR method to support seismic microzonation in the town of Idrija (W Slovenia), *Natural Hazards and Earth System Sciences*, Vol. 17, 2017, pp. 925-937.
- [20] Henstock T. J., McNeill L., Bull J., Becky J. C., Gulick S., Austin J., Haryadi P. and Yusuf D., Downgoing plate topography stopped rupture in the A.D. 2005 Sumatra earthquake, *Geology*, Vol. 44, Issue 1, 2016, pp. 71-74
- [21] Asnawi Y., Simanjuntak A. V. H., Muksin U. and Rizal S., Banda Aceh Using HVSR Analysis A Microtremor Survey to Identify Seismic Vulnerability Around Banda Aceh Using HVSR Analisis, *Elkawnie: Journal of Islamic Science and Technology*, Vol. 6, Issue 2, 2020, pp. 342-358.
- [22] Sakurai A., Bisri M. B. F., Oda T., Oktari R. S. and Murayama Y., Exploring minimum essentials for sustainable school disaster preparedness: A case of elementary schools in Banda Aceh City, Indonesia, *International Journal of Disaster Risk Reduction*, Vol. 29, Issue 8, 2018, pp. 73-83.
- [23] Musacchio G., Falsaperla S., Bernhardsdóttir A. E., Ferreira M. A., Sousa M. L., Carvalho A. and Zonno G., Education: Can a bottom-up strategy help for earthquake disaster prevention? *Bulletin of Earthquake Engineering*, Vol. 14, Issue 7, 2016, pp. 2069-2086.
- [24] Masuzawa Y., Hisada Y., Murakami M., Shindo J., Miyamura M., Suwa H., Tanaka S., Mizukoshi K., and Nakajima Y., Practice on an education and training program to the development of response literacy to the earthquake disaster in a central business district in Japan, *Journal of Disaster Research*, Vol. 9, Issue 2, 2014, pp. 216-236.
- [25] Konno K. and Ohmachi T., Ground-Motion Characteristics Estimated from Spectral Ratio between Horizontal and Vertical Components of Microtremor, *Bulletin of the Seismological Society of America*, Vol. 88, Issue 1, 1998, pp. 228-241.
- [26] Pitilakis K. D. and Kakderi K. G., Seismic Risk Assessment and Management of Lifelines, *5th International Conference on Earthquake Geotechnical Engineering*, 2011, pp. 1-53.
- [27] Yusran Y., Khalqillah A., Muksin U., and Syukri M., Estimation of Shear Wave Velocity of Darul Imarah District, Aceh Besar, Indonesia by Using 1D HVSR Inversion Estimation of Shear Wave Velocity of Darul Imarah District, Aceh Besar, Indonesia by Using 1D HVSR Inversion, Vol. 846, 2020, pp. 1-6.
- [28] Kang S. Y. and Kim K., Microtremor HVSR analysis of heterogeneous shallow sedimentary structures at Pohang, South Korea, Vol. 17, Issue 1, 2020, pp. 861-869.
- [29] Brundiars K., Educating for post-disaster sustainability efforts, *International Journal of Disaster Risk Reduction*, Vol. 6, 2017, pp. 1-9.
- [30] Sambah A. B., Miura F., Guntur, Sunardi and Febriana A. F., Geospatial model of physical and social vulnerability for tsunami risk analysis, *International Journal of GEOMATE*, Vol. 17, Issue. 63, 2019, pp. 29-34.
- [31] Setyowati D. L., Juhadi, Adhi M. A., Sidiq W. A. B. N., Pratiwi E. S., and Trihatmoko E., Spatial information learning to improve consciousness and attitude towards disasters, *International Journal of GEOMATE*, Vol. 18, Issue. 67, 2020, pp. 162-167.

ORIGINALITY REPORT

13%

SIMILARITY INDEX

10%

INTERNET SOURCES

9%

PUBLICATIONS

5%

STUDENT PAPERS

PRIMARY SOURCES

1

www.gjesm.net

Internet Source

2%

2

Submitted to Vietnam Maritime University

Student Paper

2%

3

jurnal.ar-raniry.ac.id

Internet Source

2%

4

Yusran Asnawi, Umar Muksin, Yuni Putri Tarniati, Andrian V. H. Simanjuntak, Syamsul Rizal, Muhammad Syukri. "Seismic vulnerability based on microtremor data and HVSr method in Krueng Raya, Aceh Besar", AIP Publishing, 2023

Publication

1%

5

Andrian V H Simanjuntak, Naikson Fandier Saragih, Muhajir Anshori, Marzuki Sinambela et al. "A Preliminary Earthquake Detection from The Seismic Temporary Network in The Opak Fault", IOP Conference Series: Earth and Environmental Science, 2022

Publication

1%

6	İsmail Akkaya, Ali Özvan. "Site characterization in the Van settlement (Eastern Turkey) using surface waves and HVSR microtremor methods", Journal of Applied Geophysics, 2018 Publication	1 %
7	www2.gsid.nagoya-u.ac.jp Internet Source	1 %
8	e-journal.undikma.ac.id Internet Source	1 %
9	Mudatsir Mudatsir, Samsul Anwar, Jonny K. Fajar, Amanda Yufika et al. "Willingness-to-pay for a hypothetical Ebola vaccine in Indonesia: A cross-sectional study in Aceh", F1000Research, 2019 Publication	<1 %
10	Submitted to The Scientific & Technological Research Council of Turkey (TUBITAK) Student Paper	<1 %
11	Submitted to Universitas Indonesia Student Paper	<1 %
12	journal.uir.ac.id Internet Source	<1 %
13	academic.oup.com Internet Source	<1 %

14	L. Cordrie, N. Feuillet, A. Gailler, M. Biguenet, E. Chaumillon, P. Sabatier. "A Megathrust earthquake as source of a Pre-Colombian tsunami in Lesser Antilles: Insight from sediment deposits and tsunami modeling", <i>Earth-Science Reviews</i> , 2022 Publication	<1 %
15	hal-insu.archives-ouvertes.fr Internet Source	<1 %
16	rp2u.unsyiah.ac.id Internet Source	<1 %
17	scholarsmine.mst.edu Internet Source	<1 %
18	www.e3s-conferences.org Internet Source	<1 %
19	www.tandfonline.com Internet Source	<1 %
20	"Proceedings of the Indian Geotechnical Conference 2019", Springer Science and Business Media LLC, 2021 Publication	<1 %
21	<i>Earthquakes and Their Impact on Society</i> , 2016. Publication	<1 %
22	Mahajan Ambrish Kumar, Praveen Kumar. "Site characterisation in Kangra Valley (NW	<1 %

Himalaya, India) by inversion of H/V spectral ratio from ambient noise measurements and its validation by multichannel analysis of surface waves technique", Near Surface Geophysics, 2018

Publication

23

V. H. Banyunegoro, R. Firdausi, U. Muksin, Y. Idris. "Shallow One-Dimensional Shear Wave Velocity Structure in Lhokseumawe, Aceh-Indonesia", Journal of Physics: Conference Series, 2021

Publication

<1 %

24

astro.wku.edu

Internet Source

<1 %

25

www.neliti.com

Internet Source

<1 %

26

www.geomatejournal.com

Internet Source

<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On